

Telescoping Tray System

End Opening, Side Opening and Roll In Combinations



Side Opening



Dual shock absorbers and safety cables gently lower and support side opening doors



Continuous and unbroken extruded vinyl gaskets, firmly embedded in a CFC free insulated foam panels, will not deteriorate or loosen



End Opening

End Opening Refrigerators

End opening morgue refrigerators are designed with individual door openings measuring 27" W x 22" H (68.6 cm x 55.8 cm). A telescoping mechanism fully supports the body tray. When the door is open and the end of the telescoping mechanism is fully extended, the tray is in full head-to-toe view. The cadaver can be removed by itself or in conjunction with the body tray.

Side Opening Refrigerators

Side opening morgue refrigerators are designed with individual doors 83" W x 21" H (210.82 cm x 53.3 cm). A telescoping mechanism fully supports the body tray. When the door is open, the body tray and cadaver are displayed in full side view.

Roll-In Refrigerators

Roll-in morgue refrigerators are designed to be used with a one tier or two tier body carrier. Individual doors are 27.5" W x 51" H and open to a compartment that easily accommodates a two tier body carrier.

Roll-In/End Opening Combination


Roll in/end opening combination morgue refrigerators are designed for use with telescoping mechanisms and a two tier body carrier. One door is 27" W x 22" H located directly over a roll in door 36" W x 51" H. This cooler combines both the roll in and end opening features. Cadaver removal is accomplished by extending the telescoping mechanism or rolling the one tier or two tier body carrier out of the cooler.

Telescoping Tray System

KA300 End Opening, 3 Body

- Operating Temperature: 39°F (4°C)
- 1/2 Horsepower
- R404 Refrigerant
- Electrical 115/1/60 Volt
- System Capacity: 3500 BTU/HR @ 90° Ambient


- A** Door Tag
- B** Door Handle
- C** Door Opening (27" x 22")
- D** Digital Thermometer
- E** Capsule Pak

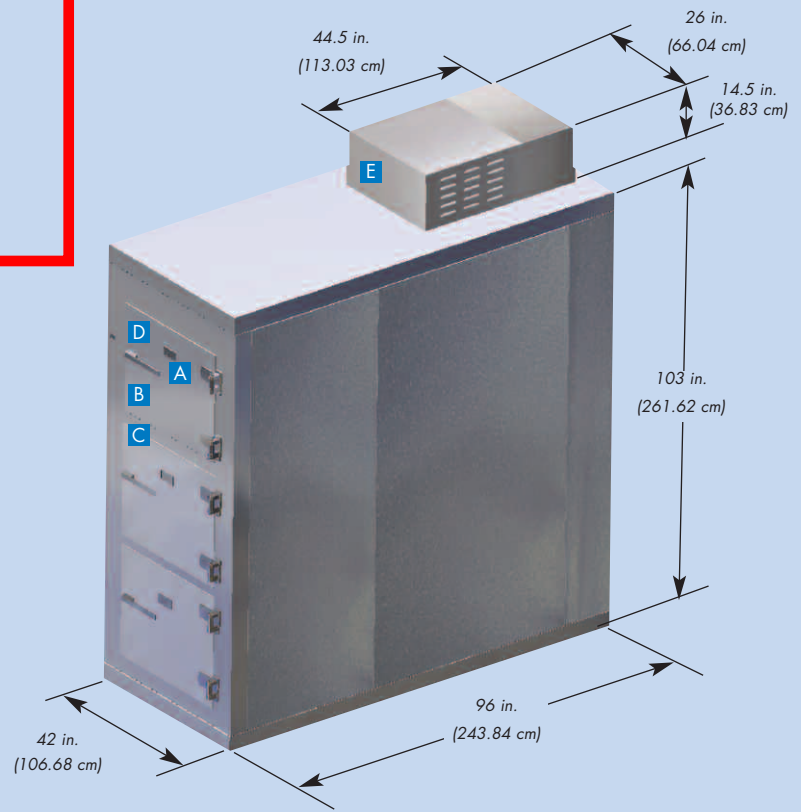

KA400 End Opening, 4 Body

- Operating Temperature: 39°F (4°C)
- 3/4 Horsepower
- R404 Refrigerant
- Electrical 208/230-1-60 Volt
- System Capacity: 5400 BTU/HR @ 90° Ambient

- A** Door Tag
- B** Door Handle
- C** Digital Thermometer
- D** Door Opening (27" x 22")
- E** Capsule Pak

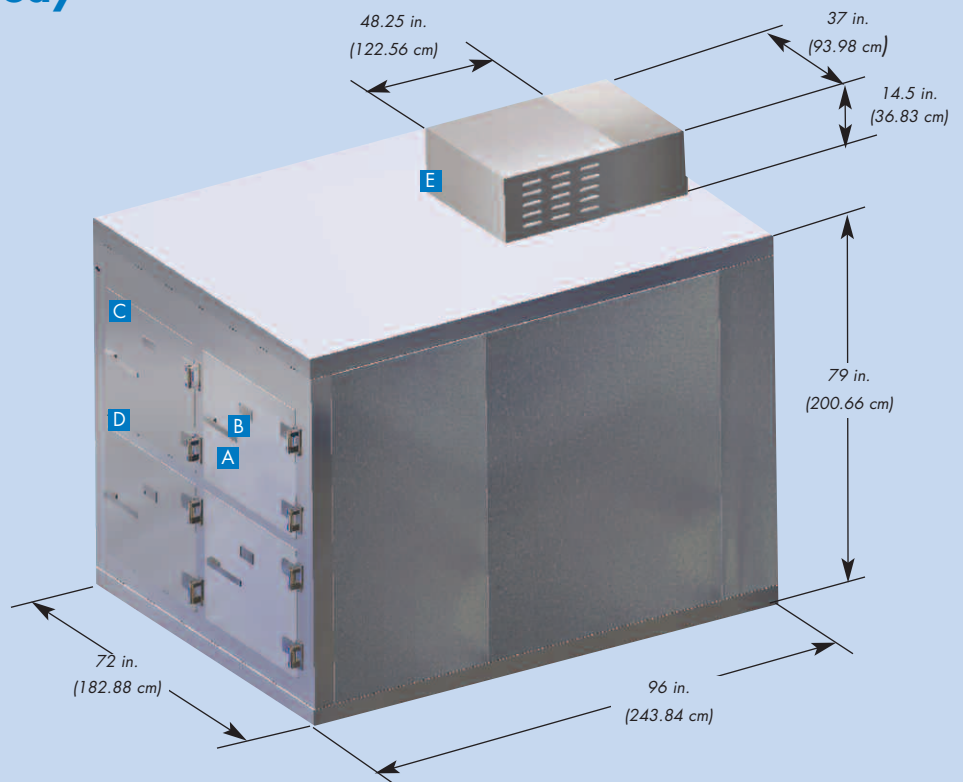


Walk In Refrigerator System

Selected by Staff

KE300 Walk In, 3 Body

- Operating Temperature: 39°F (4°C)
- 3/4 Horsepower
- R404 Refrigerant
- Electrical 208/230-1-60 Volt
- System Capacity: 5676 BTU/HR

- A Exterior Ramp
- B Heavy-Duty Cam-Lift Hinges
- C Door Closure
- D Capsule Pak Refrigeration System
- E Door Latch with Lock and Safety Release
- F Pilot Lighted On/Off Light Switch
- G Digital Thermometer

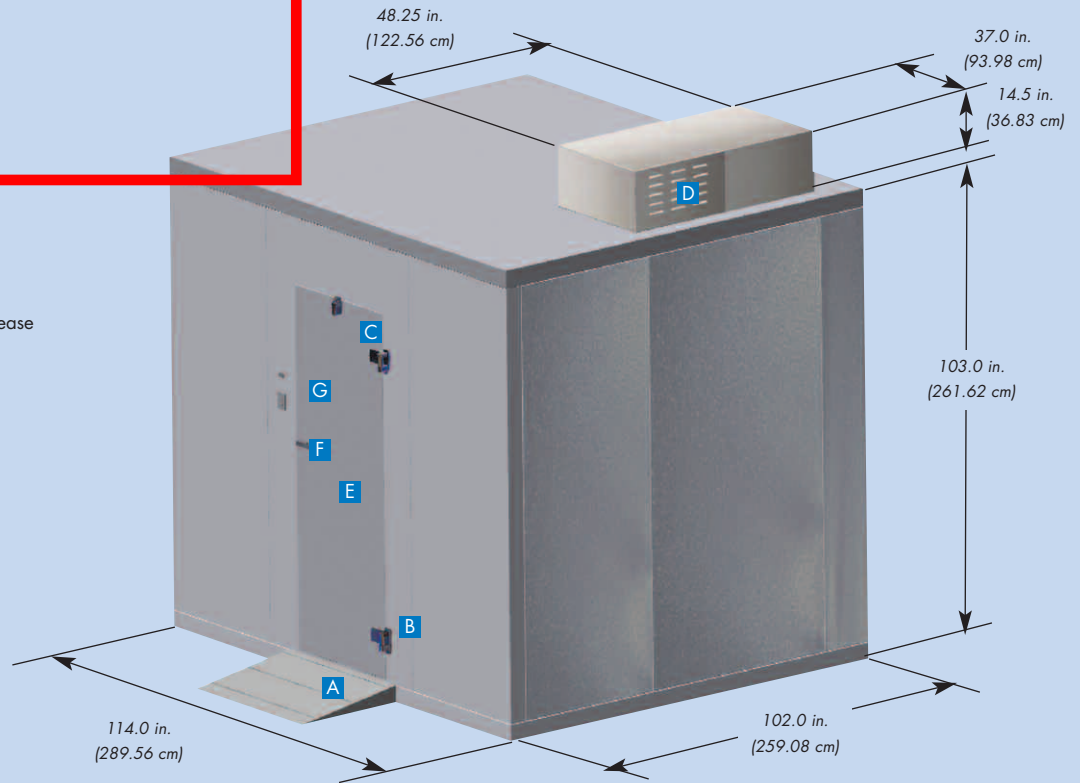

KE400 Walk In, 4-5 Body

- Operating Temperature: 39°F (4°C)
- 1/2 Horsepower
- R404 Refrigerant
- Electrical 115/1/60 Volt
- System Capacity: 3500 BTU/HR

- A Exterior Ramp
- B Heavy-Duty Cam-Lift Hinges
- C Capsule Pak Refrigeration System
- D Door Latch with Lock and Safety Release
- E Pilot Lighted On/Off Light Switch
- F Digital Thermometer

