

# **Lab-33**

## **Labconco Bacteriology**

### **Hood - No Vent**




# **WIRING DIAGRAM** **MODELS 36208 and 36209**

## **WARNING**

DISCONNECT FROM POWER  
SOURCE BEFORE SERVICING  
UNIT

CIRCUITRY FOR OPTIONAL  
U.V. LAMP SHOWN WITH  
DASHED LINES

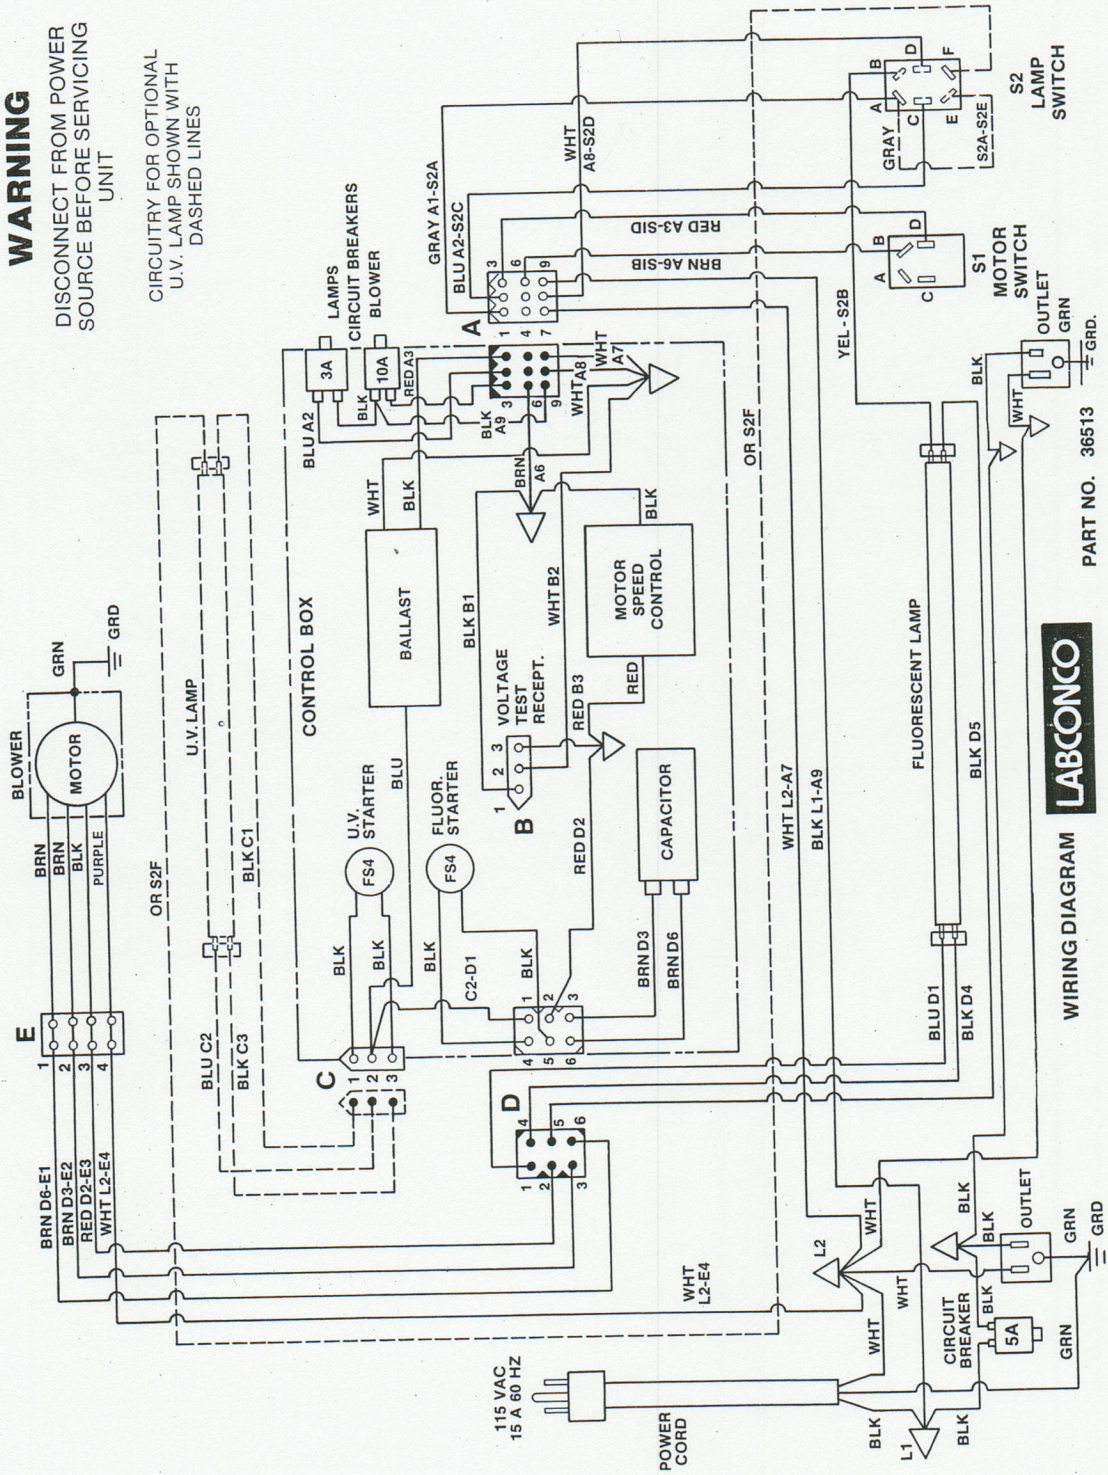

WIRING DIAGRAM **LABCONCO**

PART NO. 36513



## SPECIFICATIONS

### 36208-00 and 36209-00 Purifier Class II Safety Cabinets

50 1/4" wide X 27 3/16" deep X 58" high for operation on 115-volt, 60 Hz AC. Furnished complete with HEPA filters, 99.99% efficient on all particles .3 microns, thermally protected psc motor/blower, and solid-state speed control. An angled 3/8-inch safety glass sash with 10" or 8" access opening shall be included. Sash can be adjusted for transfer of material up to 18 inches high, The work access opening face velocity is nominal 80 FPM on Model No. 36208 and 100 FPM on Model No. 36209. The cabinet interior shall be 304 stainless steel with radiused corner,

including a removable leak-tight work surface. Unit is provided with one 40-watt fluorescent light, a differential pressure gauge, two electrical outlets, and light and blower switches. Color to be beige and brown. Shipping weight, 635 lbs.

Labconco makes two accessories available on its Purifier Cabinet: a 30-watt light, a service fixture for connection to gas, water or vacuum. All of these come factory installed by ordering one of the following numbers:

MODEL NO. 36208	MODEL NO. 36209	U.V. LIGHT	SERVICE FIXTURE
36208-01 same as 36208-00 plus	36209-01 same as 36209-00 plus	X	
36208-02 same as 36208-00 plus	36209-2 same as 36209-00 plus		X
36208-04 same as 36208-00 plus	36209-04 same as 36209-00 plus	X	X

