

|                       |                          |                         |                       |                          |                         |                            |
|-----------------------|--------------------------|-------------------------|-----------------------|--------------------------|-------------------------|----------------------------|
| <a href="#">about</a> | <a href="#">products</a> | <a href="#">model #</a> | <a href="#">parts</a> | <a href="#">warranty</a> | <a href="#">manuals</a> | <a href="#">contact us</a> |
|-----------------------|--------------------------|-------------------------|-----------------------|--------------------------|-------------------------|----------------------------|

home &gt;&gt; pellet heater

## Pellet Heater

### Self-Leveling Heated Dispenser

#### Specifications

- Stainless steel is nickel-bearing, 200 series minimum. This material is NSF recognized for corrosion resistance.
- Electrical: 208/220 VAC, 60 Hz, single phase. Eight foot grounded 20 amp power cord supplied.
- NEMA 6-20P plug.
- Option: Can be ordered in 240 VAC.
- Construction: The outer unit is constructed of 18 gauge stainless steel. Inner walls are constructed of .063 high strength aluminum. All sides and lids of unit are insulated with fiberglass insulation.
- Lids: Unique hat channel design requires no gaskets.
- Heating System: Thermostatically controlled, forced air heating system with 3200 watt element.
- Self-Leveling Dispenser: Individual, removable, self-adjusting and all stainless steel construction. Self-lubricating bearings ride over vertical guide rods. Available stacking height is 27 1/4".

Web  
Pages



Alliance Products Base and Plate  
The Alliance for Green Heat - Home  
Star Series  
Alliance Products Base and Plate  
The Alliance for Green Heat - Home  
Star Series  
Alliance Products Base and Plate  
The Alliance for Green Heat - Home  
Star Series



The Alliance for Green Heat - Home  
Star Series



[Specification Sheet](#)

[Operations Manual](#)

If you do not have Acrobat  
Reader then click here:



1-800-522-3973




[Options](#)

#### Dimensions

| Model     | Overall Size |         |         | Casters                |      | Shipping Weight | Case Cube | Electrical Specifications |            |                         | Thermostat Range                 |
|-----------|--------------|---------|---------|------------------------|------|-----------------|-----------|---------------------------|------------|-------------------------|----------------------------------|
|           | W            | D       | H       | Type                   | Dia. |                 |           | Watt                      | Amp        | Volt                    |                                  |
| DALPH1002 | 33 3/8"      | 23 3/4" | 42 3/4" | 4 swivel,<br>2 w/brake | 5"   | 270             | 24.0      | 3200                      | 16.3<br>15 | 208/220<br>60 Hz<br>240 | 250 to 290 degrees<br>Fahrenheit |
| DALPH1503 | 43 7/16"     | 23 3/4" | 42 3/4" | 4 swivel,<br>2 w/brake | 5"   | 335             | 31.1      | 3200                      | 16.3<br>15 | 208/220<br>60 Hz<br>240 | 250 to 290 degrees<br>Fahrenheit |

#### Drawings

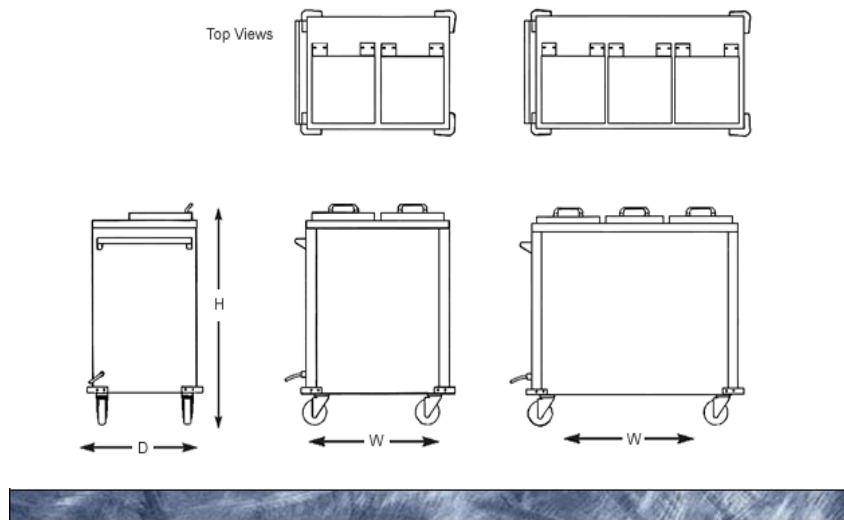

© 2011 Alliance Products, LLC  
820 Esther Lane | Murfreesboro, TN 37129  
1.800.522.3973 toll free  
615.895.5333 phone  
615.895.5334 fax

[Terms & Conditions](#)