


Equipment ID: AV-04
Dell 1510X Value Series Projector



Ceiling Mount Options
Mounting holes to accommodate a ceiling mount or tripod.

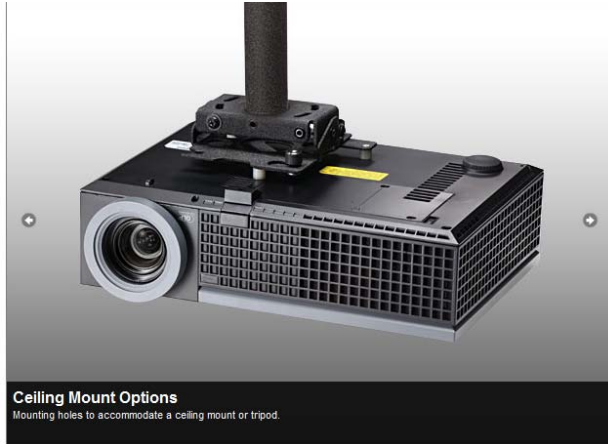

Enhanced Connectivity
Dual VGA input connectors for smooth transition between presenters and that can reduce time lag in between presentations.

PROJECTION

Brightness:
3500 ANSI Lumens (Max.)
Contrast Ratio:
2100:1 Typical (Full On / Full Off)
Resolution:
XGA (1024 x 768)
Uniformity:
85% Typical (Japan Standard - JBMA)
Projection Lens:
F-Stop: F/2.4~2.66
Zoom Lens: Manual 1.2x
Throw ratio: 1.6 (wide) - 1.92 (tele)
Image Size:
30.8" - 307" (diagonal)
Projection Distance:
3.9 ft ~ 32.8 ft (1.2m ~ 10m)
Set Up:
3D & Crestron RoomView Enabled

CONNECTIVITY

Power: AC power input socket
VGA input: two D-sub for analog/RGB component, HDTV input signals.
VGA output: One 15-pins D-sub
S-Video input: Two D-sub for analog/RGB component, HDTV input signals
Composite video input: one composite video RCA and one S-video
Audio input: one phone jack (Diameter 3.5mm) and one pair of RCA connector, one microphone input.
Networking: one RJ45 connector for networking.
USB port: One USB slave for remote support and firmware upgrade.
HDMI Input: one HDMI 1.3 (HDCP compliant).

LAMP

Lamp Life Cycle⁸:
Up to 3000-hour Typical
Up to 4000-hour Eco-Mode
Lamp Type:
Philips E20.9 225W

VIDEO COMPATIBILITY

Composite Video / S-Video: NTSC [J, M, 4.43, supports Closed Captioning (CC1~CC4)], PAL (B, D, G, H, I, M, N, Nc, 60), SECAM (B, D, G, K, K1, L)
Component Video (via VGA) & HDMI (HDCP Compliant)
- 480i/p, 576i/p, 720p, 1080i/p

AUDIO

Multimedia Audio: 8W Speaker

KEYSTONE CORRECTION

Vertical: +40° / -35°
Horizontal: N/A

COLOR, SIZE AND WEIGHT

Dimensions (W x H x D):

11.68 x 3.46 x 7.96 +/- 0.04 inches (296.5 x 87.9 x 202 +/- 1 mm)

Weight:

5.2 lbs (2.36kg)

Environmental and Regulatory

ELECTRICAL

Power:

Universal AC 100-240V 50-60Hz with PFC input

Power Consumption Operational:

Normal mode: 287W \pm 10% @ 110Vac (Network On)

275W +/-10% @220Vac (Network On)

Eco mode: 219W \pm 10% @ 110Vac (Network On)

212W +/-10% @220Vac (Network On)

Power saving mode: < 15W (Network On, Fan speed at minimum)

Standby mode: < 1W (Network Off & VGA_OUT Off)

ENVIRONMENTAL

Operating temperature:

5°C - 35°C (41°F - 95°F)

Humidity:

80% (maximum)

Storage temperature:

0°C - 60°C (32°F - 140°F)

Humidity:

90% (maximum)

WHAT'S IN THE BOX



Power Cable
VGA Cable
Carrying case
CD User's Guide
Remote Control with 2 AAA Batteries
Quick Setup guide & Product Information guide